

RemoteAmp™

Headphone Amplifier




FEATURES

	RA	R2
» Compatible with Party-Line Intercoms		•
» XLR Line level Input	•	•
» XLR Line In Volume Control	•	•
» 1/8" (3.5mm) Stereo Line Input Jack		•
» 1/8" (3.5mm) Line In Volume Control		•
» 1/4" Stereo Headphone Jack	•	•
» 1/8" (3.5mm) Earpiece Jack	•	•
» Stainless Steel Belt Clip	•	•
» >20 Hours on one 9V Battery	•	•

RemoteAmp Two is shown for comparison

RA = RemoteAmp **R2** = RemoteAmp Two

BLOCK DIAGRAM

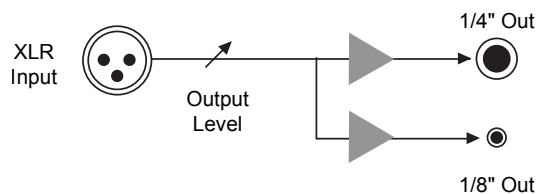

Cut through the Crowd Noise. The RemoteAmp is a simple battery-powered personal headphone amplifier. Use the RemoteAmp as an IFB earpiece or headphone amplifier, or as an on-stage monitor headphone amplifier. This low-distortion, 1 watt amplifier will cut through the crowd noise without distortion.

Volume Under Control. The RemoteAmp clips to your belt and accepts a 3-pin XLR audio input from a mixer, distribution amplifier, telephone line hybrid, or a handset interface like our QuickTap IFB. You'll like the convenience features, such as the separate power switch, which allows you to leave the volume control set at a comfortable level.

SPECIFICATIONS



Line Input

Female XLR:	4k ohms 100 mV RMS (-18 dBu nom, +12 dBu max) Max Gain: 46 dB
--------------------	---

Line Output

1/4" Mono/Stereo:	8 ohms, 1 Watt max
1/8" (3.5mm) Mono:	150 ohms, 100 mW nom.
Frequency Response:	30 Hz - 20 kHz ± 1 dB
Power:	One 9 volt Alkaline Battery
Size:	5.1" x 2.7" x 1.3" (13 x 6.9 x 3.3 cm)
Weight:	10 oz. (275 g)